



▶ Product Appearance



▶ Product Size

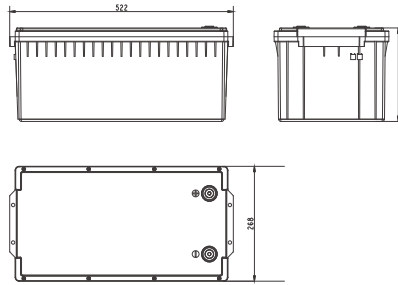

▶ Packaging Size

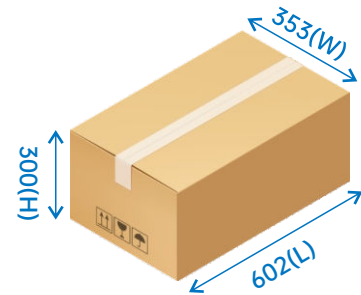

Net Weight: 30.7±0.5kg

Gross Weight: 33.2±0.5kg


▶ Features

- A grade brand new prismatic LiFePO₄ cells
- Cell balance function
- >4000 cycles @80% DOD(25°C, 0.5C)
- IP65 superior safety
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- Certificate: UN38.3, MSDS, IEC62619、CE-RED、ROHS
- Easy installation and maintenance free
- Supports series and parallel connection
- Charging Heating Technique
- Supports Bluetooth communication


▶ Technical Specifications

Model	LFP3.84KWH25.6V-P65L2TN40
Battery Type	LiFePO ₄
Nominal Voltage (V)	25.6
Nominal Capacity (AH)	150
Energy (WH)	3840
Pack Mode	8S1P
Charge Cut-off Voltage (V)	28.8
Discharge Cut-off Voltage (V)	20.8
Max.Charge Current (A)	100
Max.Discharge Current (A)	150
Peak Discharge Current (A)	250A@2S
Recommend Discharge Current (A)	75
Recommend Discharge Deapth (%)	80
Cycle Life	>4000 cycles (25°C, 0.5C) 80% DOD
Communication	Bluetooth
Charge&Discharge Temperature(°C)	Charge: 0°C~+50°C/Discharge: -20°C~+60°C (Automatic heating when charging below 0°C)
Optimal Storage Temperature(°C)	5°C ~ +35°C
Recommend Storage Humidity	60%±20% RH
Terminal	M8
Dimensions (L*W*H) (mm)	522*268*118
Weight (Kg)	30.7±0.5
Certificate	UN38.3, MSDS, IEC62619、CE-RED、ROHS
IP Class	IP65


Different Rate Discharge Curve@25°C

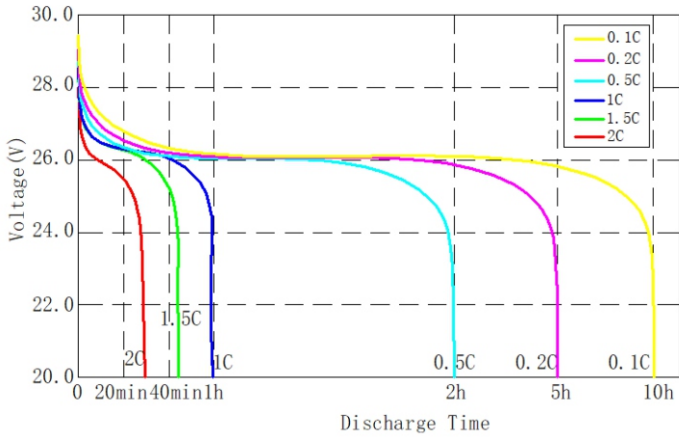


Different Temperature Discharge Curve@0.5C

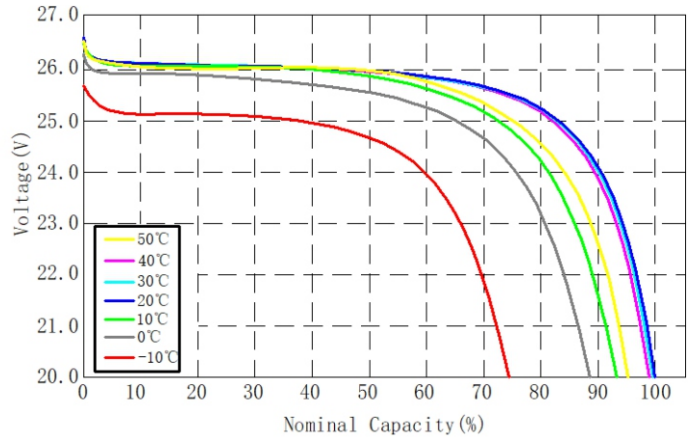


State of Charge Curve@0.5C 25°C

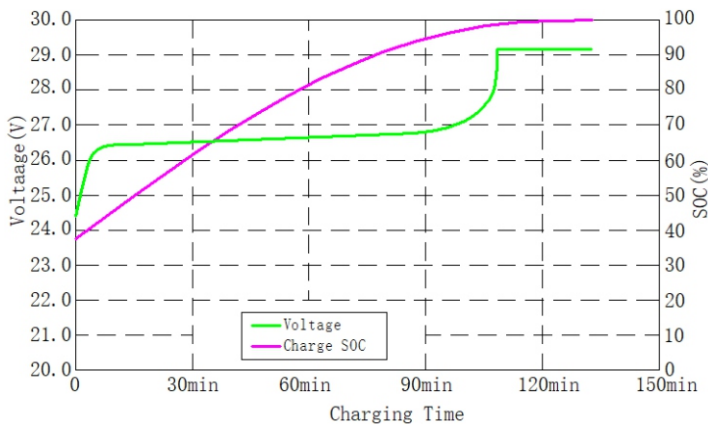

Charging Characteristics @0.5C 25°C

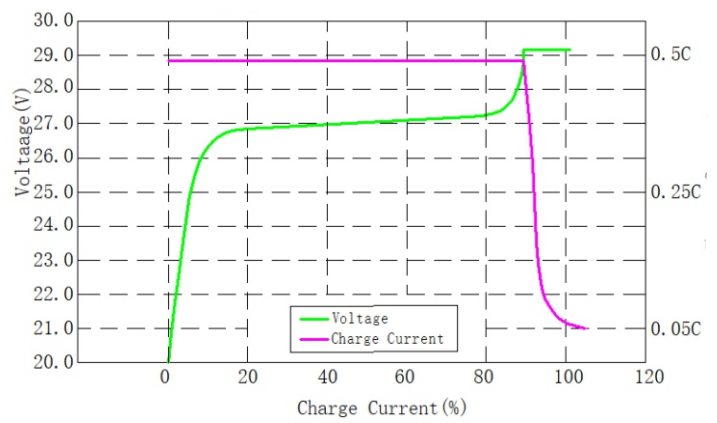

Different DOD Discharge Cycle Life Curve@0.5C 25°C

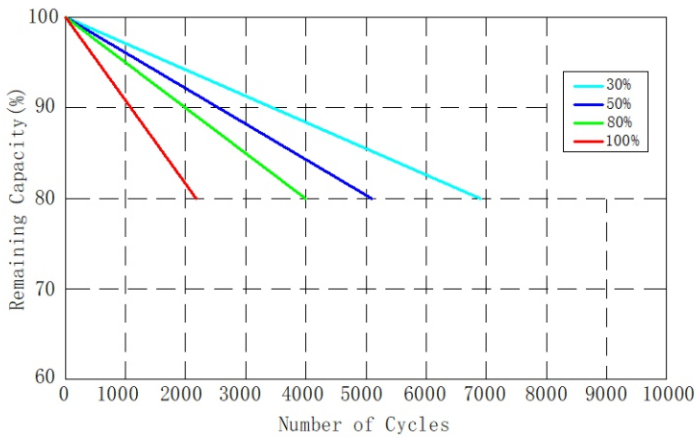

Different Temperature Self Discharge Curve

