

48V 100Ah LITHIUM BATTERY




► Features

- A grade brand new prismatic LiFePO4 cells
- > 6000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- LCD display screen to monitor cell SOC, voltage, temperature and alarm status
- Metal Case, excellent heat dissipation, more safety
- Rack-mounted style
- Certificate: UN38.3, MSDS, IEC62619
- Max 8 battery packs can be connected in parallel


► Electrical Characteristics

Model	LFP4.8KWH48V-P20R4
Battery Type	LiFePO4
Nominal Voltage (V)	48
Nominal Capacity (AH)	100
Energy (WH)	4800
Pack Mode	15S1P
Continuous Discharge Current (A)	50
Charge Cut-off Voltage (V)	54
Discharge Cut-off Voltage (V)	39
Max.Charge Current (A)	50
Max.Discharge Current (A)	100
Peak Discharge Current (A)	120@10S
Recommend Discharge Current (A)	50A
Recommend Discharge Depth (%)	80
Cycle Life	> 6000 cycles (25°C, 0.5C) 80% DOD
Communication	RS485
Function	LCD
Charge&Discharge Temperature (°C)	Charge: 0°C~+55°C / Discharge: -20°C~+60°C
Optimal Storage Temperature (°C)	5°C ~ +35°C
Recommend Storage Humidity	20%~80%
Terminal	M6
Dimensions (W*H*D) (mm)	495*510*150
Weight (Kg)	45.6±0.5
Certificate	UN38.3, MSDS, IEC62619
IP Class	IP20


Different Rate Discharge Curve@25°C

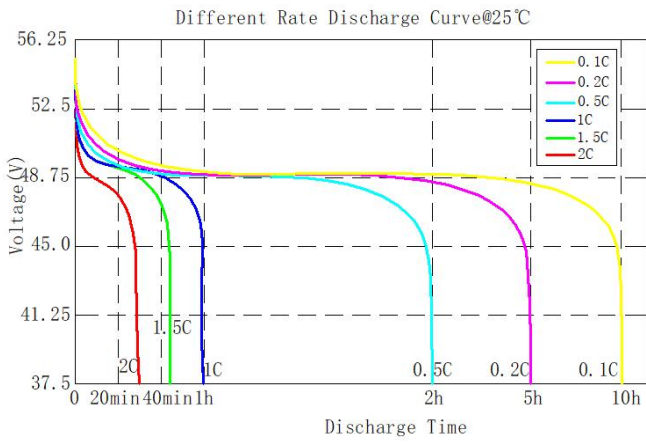


Different Temperature Discharge Curve@0.5C

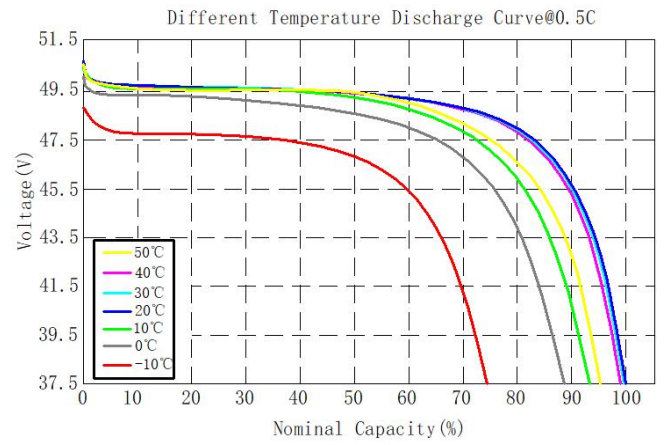


State of Charge Curve@0.5C 25°C

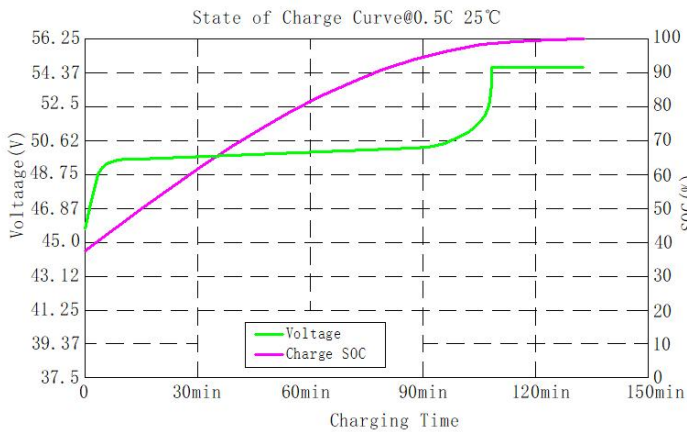

Charging Characteristics@0.5C 25°C

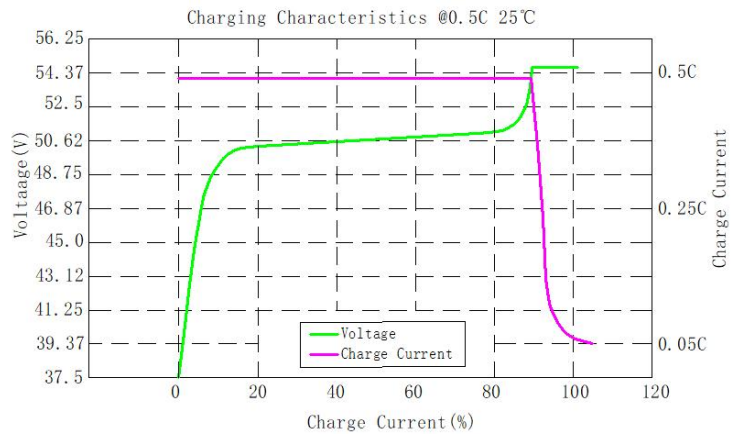

Different DOD Discharge Cycle Life Curve@0.5C 25°C

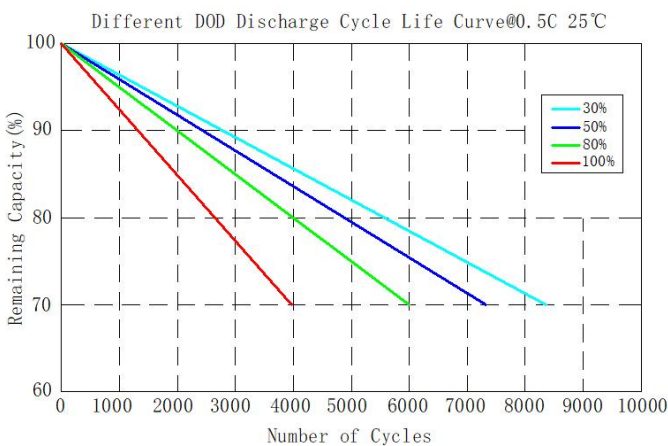

Different Temperature Self Discharge Curve

