



▶ Product Appearance



▶ Product Size

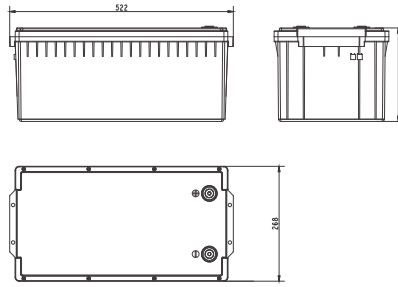

▶ Packaging Size

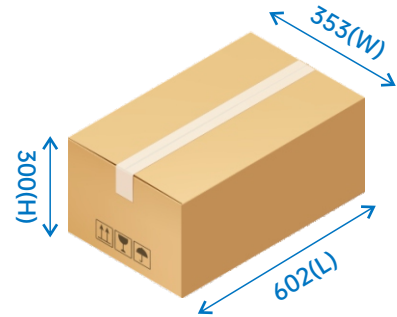

Net Weight: 23.5±0.5kg

Gross Weight: 26.3±0.5kg


▶ Features

- A grade brand new prismatic LiFePO₄ cells
- Over charge, over discharge, over temperature, low Temperature, over current and short circuit protection
- Cell balance function
- Certificate: UN38.3, MSDS
- >4000 cycles @80% DOD(25°C, 0.5C)
- ABS case, excellent heat dissipation, enhanced safety
- Easy installation and maintenance free
- IP65, superior safety
- Max.4 battery packs can be connected in parallels


▶ Technical Specifications

Model	LFP2.56KWH12.8V-P65L3GF40
Battery Type	LiFePO ₄
Nominal Voltage (V)	12.8
Nominal Capacity (AH)	205
Energy (WH)	2624
Pack Mode	4S1P
Continuous Discharge Current (A)	100
Charge Cut-off Voltage (V)	14.4
Discharge Cut-off Voltage (V)	10.4
Max.Charge Current (A)	100
Max.Discharge Current (A)	200
Peak Discharge Current (A)	240@10S
Recommend Discharge Current (A)	100
Recommend Discharge Depth (%)	80
Cycle Life	>4000 cycles (25°C, 0.5C) 80% DOD
Communication	—
Charge&Discharge Temperature (°C)	Charge: 0°C~+55°C / Discharge: -20°C~+60°C
Optimal Storage Temperature (°C)	5°C ~ +35°C
Recommend Storage Humidity	60%±20% RH
Terminal	M8
Dimensions (L*W*H) (mm)	522*268*218
Weight (Kg)	23.5±0.5
Certificate	UN38.3, MSDS
IP Class	IP65


Different Rate Discharge Curve@25°C

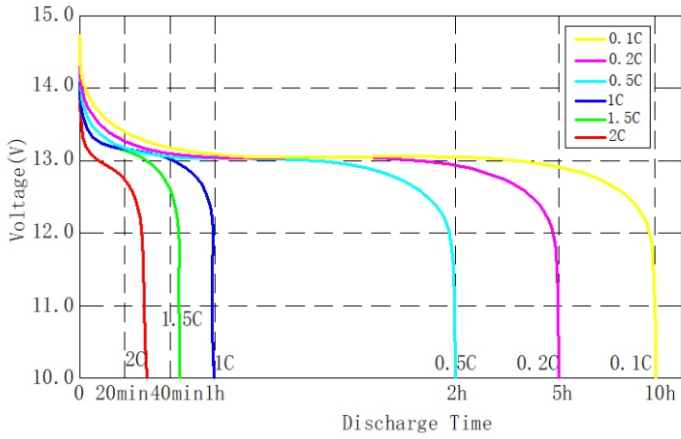


Different Temperature Discharge Curve@0.5C

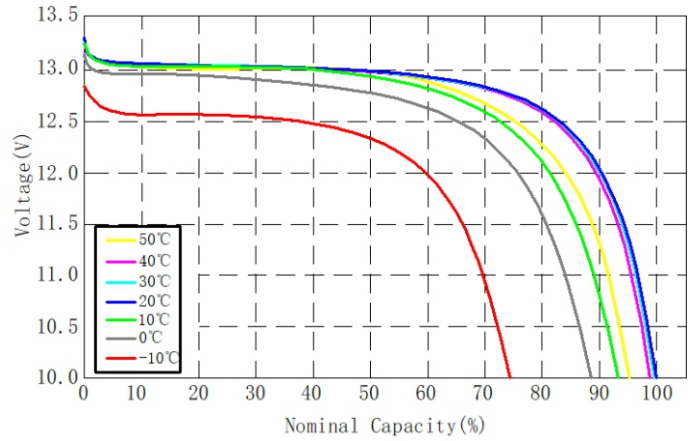


State of Charge Curve@0.5C 25°C

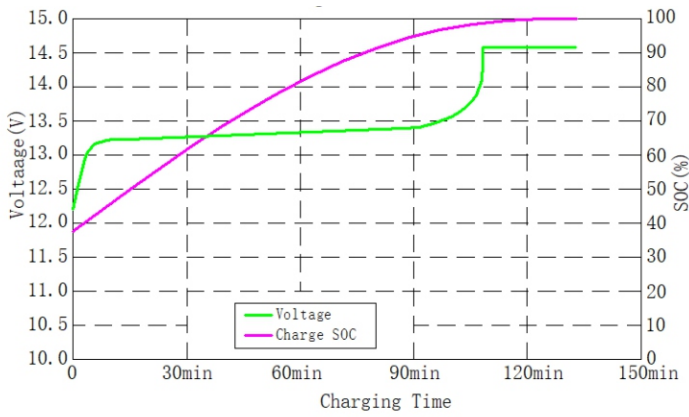

Charging Characteristics @0.5C 25°C

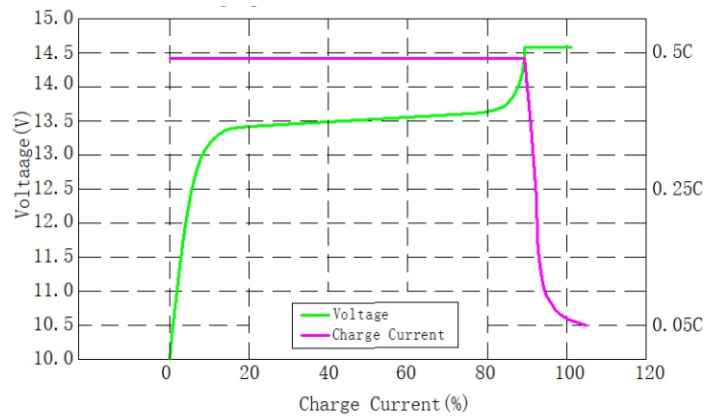

Different DOD Discharge Cycle Life Curve@0.5C 25°C

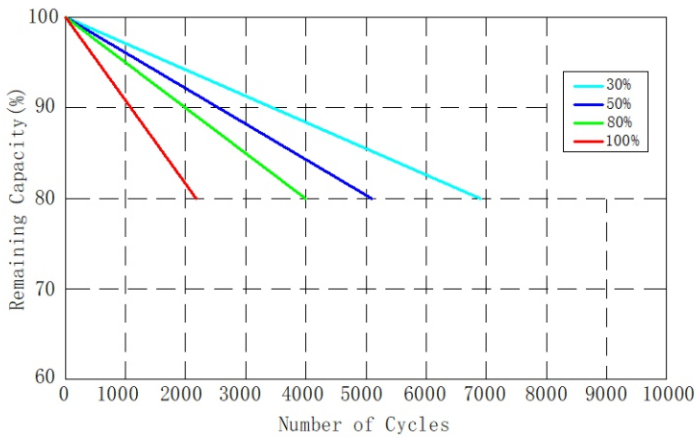

Different Temperature Self Discharge Curve

